



P.C.B LAYOUT
TOP VIEW

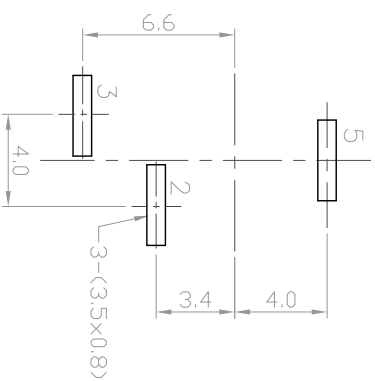

SCHEMATIC



- SPECIFICATION**
1. Rating : DC 30V 0.5A / DC 6V 3A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. life test : 5,000 cycles

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS
.x	±0.30
.xx	±0.20
.xxx	±0.10
.x°	±3.0°
.xx°	±2.0°
.xxx°	±1.0°

UNIT: MM	TYPE:	MODEL NO:	PAGE 1 OF 1	
	DC JACK	DC00150-X	PAPER NO: A4	SCALE 3:1
DESIGNER BY:				VER 1
CHECK BY:				
APPROVED BY:				

PIN	$\phi 2.0$	$\phi 2.5$
APPD	AH	AJ

承永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.