

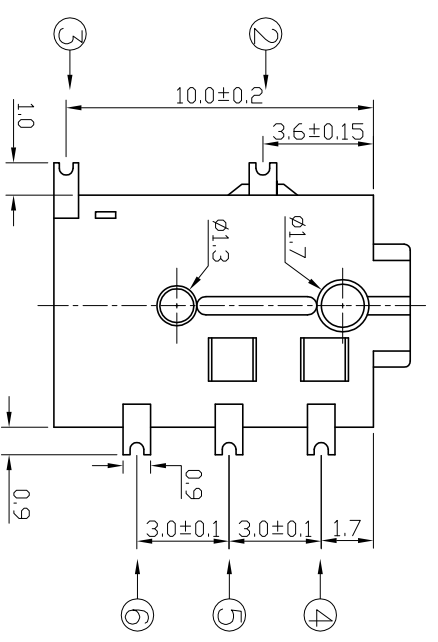


P.C.B LAYOUT  
TOP VIEW

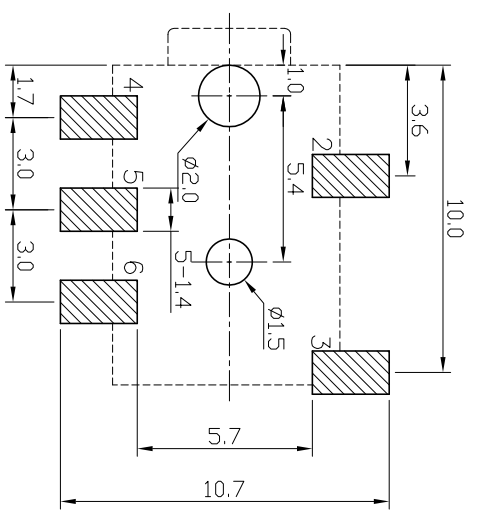

SCHEMATIC



- SPECIFICATION
1. Rating : DC 30V 0.5A
  2. Contact resistance :  $\leq 0.03\Omega$
  3. Insulation resistance :  $\geq 100M\Omega$  (DC250V)
  4. Withstand voltage : 500VAC
  5. Insertion and extraction force : 3-20N
  6. Life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	CONTACT FOOT	1	BRASS T=0.2	Au-Plating
5	CONTACT FOOT	1	Be-Cu T=0.2	Au-Plating
4	CONTACT FOOT	1	Be-Cu T=0.2	Au-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE T=0.2	Au-Plating
2	CURVE PIECE	1	BRASS T=0.2	Au-Plating
1	HOUSING	1	PA9T	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		UNIT: MM	TYPE: PHONE JACK	MODEL NO: PJ20210-X	PAPER NO: A4	PAGE 1 OF 1	
DESIGNER BY:						SCALE	VER
CHECK BY:						5:1	1
APPROVED BY:							