
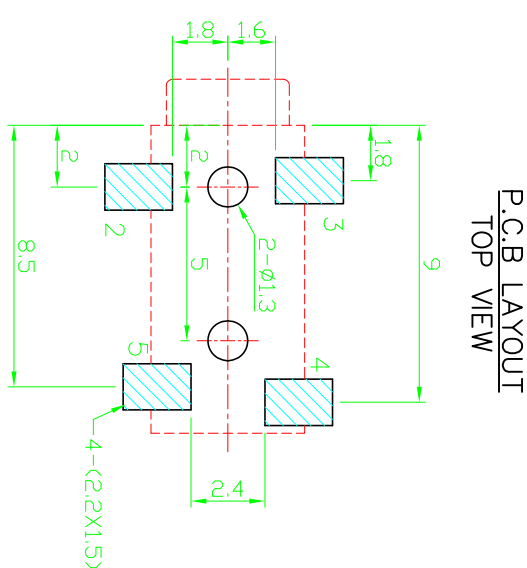
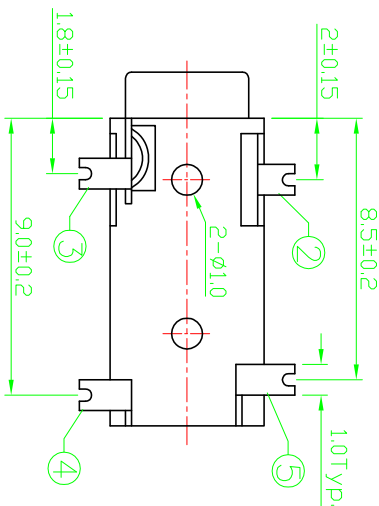


SCHEMATIC



- SPECIFICATION**
- Rating : DC 30V 0.5A
 - Contact resistance : $\leq 0.03\Omega$
 - Insulation resistance : $\geq 100M\Omega$ (DC250V)
 - Withstand voltage : 500VAC
 - Insertion and extraction force : 3–20N
 - Life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	SPRING PIECE	1	PHOSPHOR BRONZE T=0.2	Ag-Plating
4	SPRING PIECE	1	PHOSPHOR BRONZE T=0.2	Ag-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE T=0.2	Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE T=0.2	Ag-Plating
1	HOUSING	1	PA9T	Ag-Plating

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	UNIT: MM
X	±0.30
XX	±0.20
XXX	±0.10
X*	±30°
XX*	±20°
XXX*	±1.0°

DESIGNER BY:	
CHECK BY:	
APPROVED BY:	

PHONE JACK	MODEL NO:	PAPER NO: A4
	PJ20340-X	

SCALE	VER
4:1	1

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.