



Circuit Diagram



PCB LAYOUT

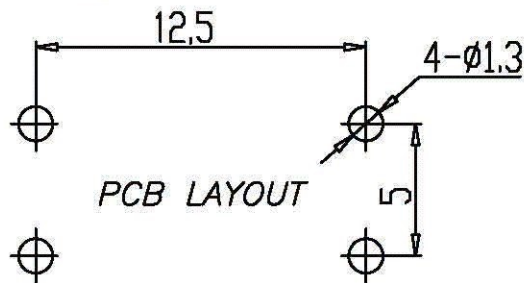

	1103	1103L	1103C	1103AA	1103AB	1103BB	1103B
L	4.3	5.0	5.5	6.0	6.5	7.0	7.5
L	1103K	1103G	1103H	1103F	1103Q	1103R	1103D
	8.0	8.5	9.0	9.5	10.0	11.0	12.0
L	1103I	1103O	1103M	1103J	1103HH	1103W	
	13	14.0	15.0	16.0	17.0	18.0	

NO	NAME	MATERIAL	NATIONALITY	QTY	
1	TERMINAL	Brass	CHINA	1	Silver plating
2	CASE	PA66	CHINA	1	Black
3	CONTACT	Phosphor bronze	KOREA	1	Contact side silver plating
4	COVER	SPCC-SD	CHINA	1	CuSn plating
5	STEM	PA66	CHINA	1	Black

SPECIFICATIONS:

- 1. Rating :DC 12V 50mA
- 2. Travel :0.3±0.15mm
- 3. Contact Resistance :100mΩ Max
- 4. Life:100,000 Cycles Min.

TYPE	1	2	3
Operating Force	130±30gf	160±30gf	250±30gf

	單位	比例	日期	核准	審核	設計繪圖	料號	TSD-1103HW(-)(-)-B-K		頁數	1/1
	mm	FREE	2016-09-06					TACT SWITCH 12mm* 12mm DIP 4PIN		版本	B
丞永實業有限公司 BLUE SOURCES ELECTRONICS CO.,LTD				WILLIAM	AMY	EWS	圖號	TSD-1103HW(-)(-)-B-K			